DATASHEET - CI-PKZ01-PVT



Insulated enclosure, IP65_x, +emergency switching off mushroom pushbutton, for PKZ01



CI-PKZ01-PVT Part no. Catalog No. 281406

EL-Nummer 0004365003 (Norway)

Delivery program

71 0	
Product range	Accessories
Subrange	Surface mounting enclosures
Accessories	Insulated enclosures for PKZ
	with emergency switching off mushroom push-button maintained
Degree of Protection	IP65
For use with	PKZM01 +NHI-E +U or A +L (2 off)

Notes With integrated PE(N) terminal.
In each case 2 metric M25 cable entry knockouts with thread top and bottom.
2 metric M20 cable entry knockouts in the rear wall.
Hard mirror with cable entry knockouts which can be cut out.

Design verification as per IEC/EN 61439			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	0
Heat dissipation per pole, current-dependent	P _{vid}	W	0
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	10
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Please enquire
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Empty enclosure for switchgear (EC000712)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Empty housing for switch devices (ecl@ss10.0.1-27-37-13-01 [AKN343014])

Concession 27 of the of Financial City					
	Plastic				
mm	97				
mm	160				
mm	80				
	No				
	Yes				
	Surface mounting				
	IP65				
	Other				
	mm				

Approvals

Specially designed for North America No

Dimensions

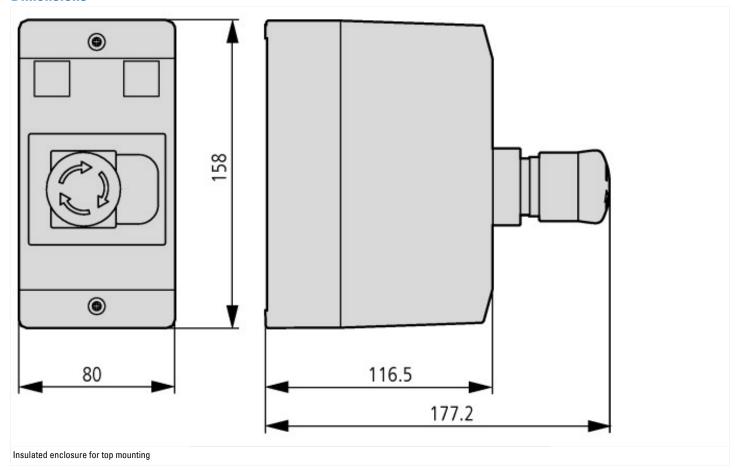

Additional product information (links)

IL03407018Z (AWA1210-2134) Enclosures surface/flush mounting for Motor-protective circuit-breaker			
IL03407018Z (AWA1210-2134) Enclosures surface/flush mounting for Motor-protective circuit-breaker	ftp://ftp.moeller.net/D0CUMENTATION/AWA_INSTRUCTIONS/IL03407018Z2018_05.pdf		
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf		
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf		