




Sample photo

Order symbol: PC 1919 13 T
Product nbr: 5330059
Description: Enclosure, PC
Remarks: Transparent cover

EAN: 6418074005397
EI. number:
 Finland 3423801
 Italy 7402010D
 Sweden 2539436

Including: Base with screws for mounting plate/DIN-rail, cover with PUR gasket and polyamide cover screws.

| Dimensions: | | | | Rating: | |
|-------------------------------|----------------------|-----|-----|--|--|
| | L | W | H | | |
| mm: | 188 | 188 | 130 | Ingress Protection (EN 60529): IP 66/67 | |
| inch: | 7.4 | 7.4 | 5.1 | Impact Resistance (EN 50102): IK 08/09 | |
| Materials: | | | | Electrical insulation: Totally insulated | |
| Material: | PC | | | Halogen free (DIN/VDE 0472, Part 815): Yes | |
| Base colour: | RAL 7035 | | | UV resistance: UL 508 | |
| Cover colour: | Clear transparent | | | Flammability Rating (UL 746 C 5): UL 94 5V | |
| Cover screws material: | Polyamide | | | Glow Wire Test (IEC 695-2-1) °C: 960 | |
| Cover screws colour: | Grey | | | NEMA Class: NEMA 1, 3, 3S, 4, 4X, 6, 6P, 12 | |
| Gasket material: | Polyurethane | | | Certificates: | |
| Temperatures: | | | | Underwriters Laboratories | |
| Short term: | -40 ... 120 °C | | | Canadian Standards Association | |
| Continuous: | -40 ... 80 °C | | | Fimko | |
| Short term: | -40 ... 250 °F | | | Europe EN 50298 1998 | |
| Continuous: | -40 ... 175 °F | | | UL Canada | |
| Accessories: | | | | Gost R | |
| EKHVT | Mounting plate | | | | |
| EKV 12 | DIN-35 Mounting rail | | | | |

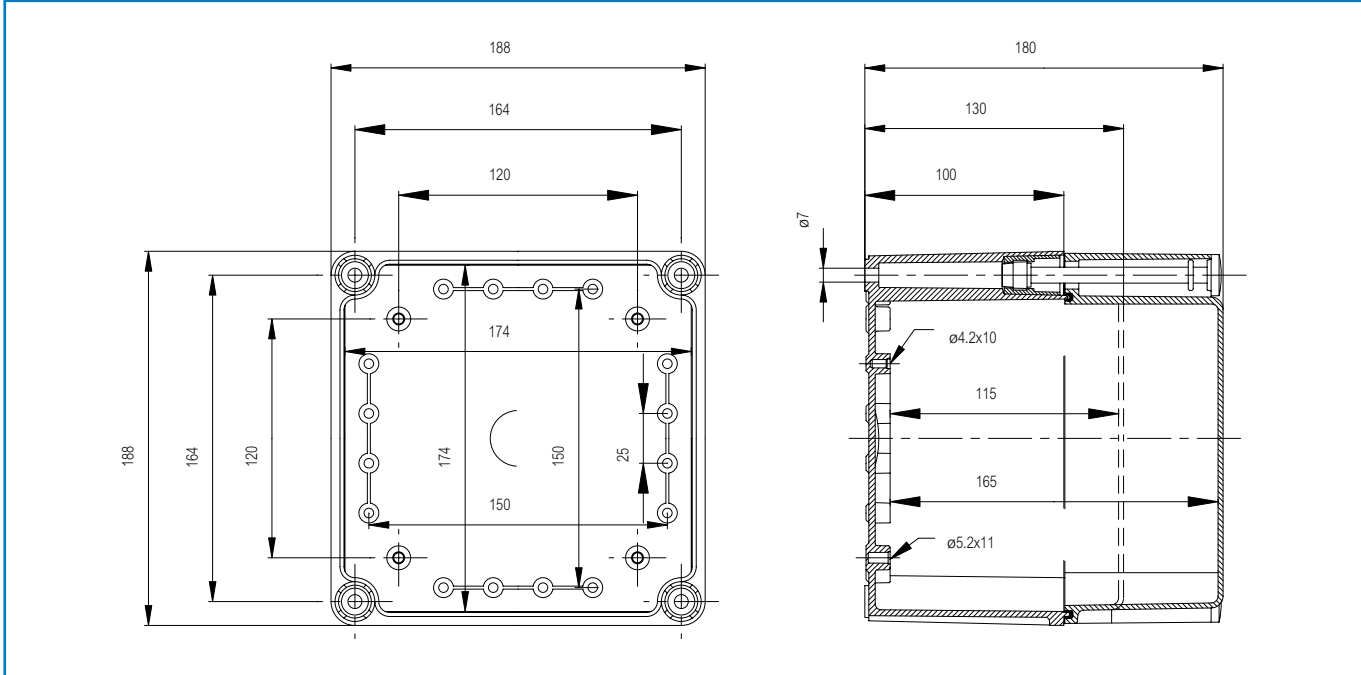

(c) Fibox OY, Data subject to change without notice