FIBOX EK EKOE 180 T

Sample photo

Order symbol: EKOE 180 T
Product nbr: 2538140

Description: Enclosure, PC
Remarks: Transparent cover

EAN: 6418074013842
El. number:
Finland 3425469
Italy 7502140D
Sweden 2538140

Including: Flanged Base with screws for mounting plate/DIN-rail, cover with PUR gasket and polyamide cover screws.

Dimensions:	L	W	H
mm:	280	280	180
inch:	11	11	7.1

Materials:

Material: PC
Base colour: RAL 7035
Cover colour: Clear transparent
Cover screws material: Polyamide
Cover screws colour: Grey
Gasket material: Polyurethane

Temperatures:

Short term: -40 ... 120 °C
Continuous: -40 ... 80 °C
Short term: -40 ... 250 °F
Continuous: -40 ... 175 °F

Accessories:

EKOVT Mounting plate
EKV 22 DIN-35 Mounting rail
EKOZR Extension frame

Rating:

Ingress Protection (EN 60529): IP 66/67
Impact Resistance (EN 50102): IK 08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): Yes
UV resistance: UL 508
Flammability Rating (UL 746 C 5): UL 94 5V
Glow Wire Test (IEC 695-2-1) °C: 960
NEMA Class: NEMA 1, 3, 3S, 4, 4X, 6, 6P, 12

Certificates:

Germanischer Lloyd (GL)
Underwriters Laboratories
Det Norske Veritas
Bureau Veritas
Fimko
Lloyds Register of Shipping (LR)
Europe EN 50298 1998
UL Canada
Gost R

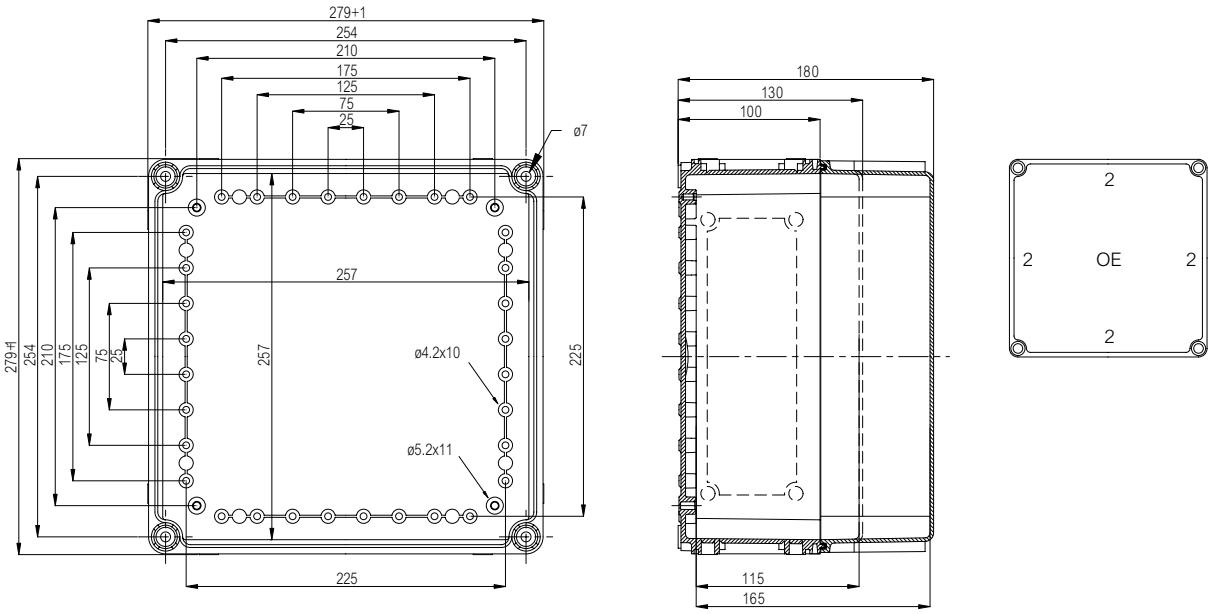

(c) Fibox OY, Data subject to change without notice